


LED COOLER LIGHT



A
D
C

| Maximum overall | A | B | C | D |
|-----------------|--------|--------|------|------|
| 4F T | 1292mm | 1192mm | 32mm | 29mm |
| 5F T | 1592mm | 1492mm | 32mm | 29mm |
| 6F T | 1892mm | 1792mm | 32mm | 29mm |

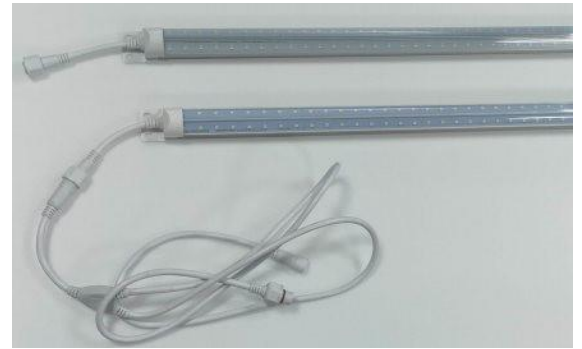

FEATURES



| | |
|------------------------------|-----------------|
| Input voltage: ! | AC100-250V! |
| Operating frequency: ! | 50/60Hz! |
| Power factor: ! | ! 0.90 ! |
| Ambient temperature range: ! | -20 °C ~+40°C ! |
| Color Temp: ! | 3000 K~5000K ! |
| THD: ! | <2% ! |
| IP Rating: ! | IP20! ! |
| CRI: ! | >80 Ra |
| Beam angle: ! | 170 ° ! |
| Cover: ! | Clear,Stripy |

- Luminous Flux:>125lm/w
- Housing material:6063-T5
- Suitable for Damp Location
- Suitable to use in UL approved enclosed fixtures
- 5 years' warranty

PARAMETER

| Length (ft) | Product code | Certification | CRI | Wattage | Lumens 3000-5000 K | Packing/carton | Weight/carton |
|-------------|----------------|------------------|-----|---------|--------------------|--|---------------------------|
| 4ft | ZS-T8V1218T-CC | ETL/ cETLus, DLC | >80 | 18W | 2250 lm | 1330" 230 " 200 mm 30 pieces 1X40HQ Loading=33,000pcs | 12kg 15.5 kg (Y-cable) |
| 5ft | ZS-T8V1532T-CC | ETL/ cETLus, DLC | >80 | 32W | 4000 lm | 1630" 230 " 200 mm 30 pieces 1X40HQ Loading=27,300pcs | 14kg 18kg (Y-cable) |
| 6ft | ZS-T8V1840T-CC | ETL/ cETLus, DLC | >80 | 40W | 5000 lm | 1930" 230 " 200 mm 30 pieces 1X40HQ Loading=23,400pcs | 17kg 21kg (Y-cable) |


MOUNTING GUIDES

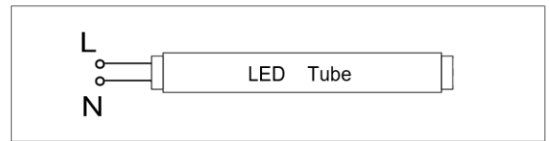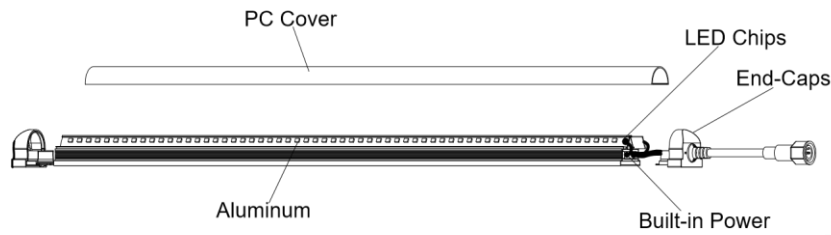

Electric Shock Attention

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTION

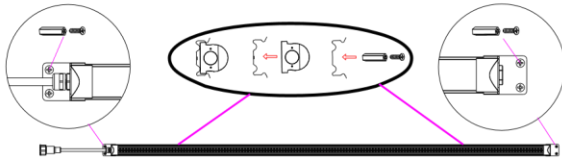

Disconnect the power before Installation

- Step1.Install the mounting clip.Locate the mounting clip at the position where the tube is installed on and fixed by screws.
Check the fixity of the mounting clip to make sure it cannot be loosened and shacked.
- Step2.Fix the tube. Align the mounting clip on the back of the tube and jam the tube into the clip firmly.
- Step3.Use male and female joint cables to connect multi tubes(A to B),max power should be less than 250W.
- Step4.Turn on the power.

WARNING:

1. Risk of fire or electric shock,disconnect power before installation.
2. The electrical rating of these products are 100-277Vac,the installer must determine whether they have 100-277Vac at the luminaries before installation.
3. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
4. To prevent wiring damage or abrasion,do not expose wiring to edges of sheet metal or other sharp objects.

L
N
AC:100-277V

L
N
AC:100-277V

L
N
AC:100-277V

Warning:

- Make sure all the power is off before installation.
- All the installations are required to be done by professionals.