# LED EXIT SIGN

## Battery Backup Emergency Exit Sign

Model CM-127RE | Red EXIT Letters | Black & White Housings




**Black and white housing | Red illuminated EXIT lettering**

## MAIN FEATURES

- Red illuminated EXIT lettering
- 90-minute minimum emergency backup
- Black or white housing options
- Wall, ceiling or side mounting

**5755 Bonhomme Rd, Suite 412, Houston 77036**
**10004 Gulf FWY, Houston 77034**
**(833) ZARA-LED**
**(281) 8400-8608**
**info@zaraled.com**
**www.zaraled.com**


# TECHNICAL SPECIFICATIONS

## ELECTRICAL & PERFORMANCE

| | |
|---|---|
| **Operating voltage**<br>120V / 277V AC | **Battery rating**<br>1.2 V / 800 mAh (manual) |
| **Frequency**<br>60 Hz | **Recharge time**<br>24 hours |
| **Input wattage**<br>5.3 W / 6 W | **Emergency runtime**<br>At least 90 minutes |
| **Input current**<br>0.04 A / 0.02 A | **Mounting**<br>Wall / ceiling / side |
| **Output wattage**<br>1 W | **Housing color**<br>Black / white |
| **LEDs**<br>6 red LEDs, 5 mm | **Safety standard**<br>UL 924 |

## DIMENSIONS

**Overall width x height x depth** **11.73 x 7.36 x 1.77 in (298 x 187 x 45 mm)**

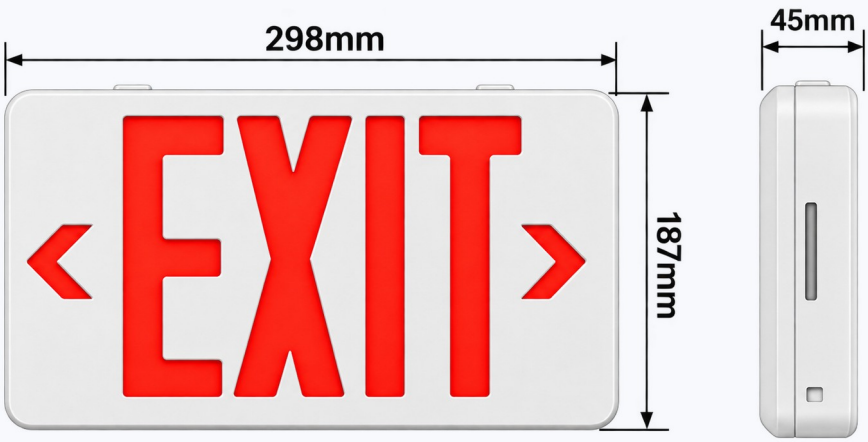


## INSTALLATION & CONFIGURATION

- Indoor use; compatible with wall, ceiling and side junction-box mounting.
- 120V hot: black lead | 277V hot: red lead | Neutral: white lead.
- Cap unused supply lead. Installation by qualified personnel only.
- Allow 24 hours of battery charging before full-load testing.

**5755 Bonhomme Rd, Suite 412, Houston 77036** **(833) ZARA-LED** **info@zaraled.com**
**10004 Gulf FWY, Houston 77034** **(281) 8400-8608** **www.zaraled.com**