





LED Panel Light

We enjoy our work in
a comfortable working environment.

www.zaraled.com

LED Panel Light 2*2

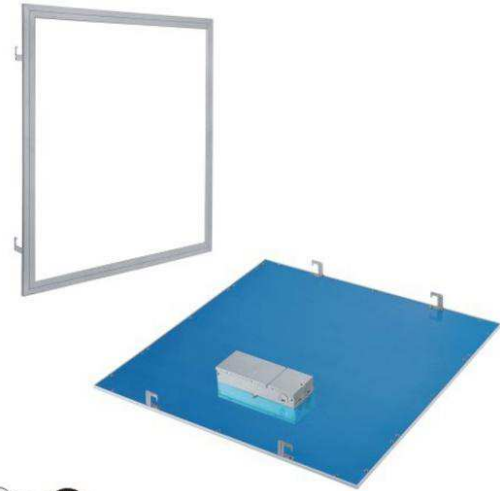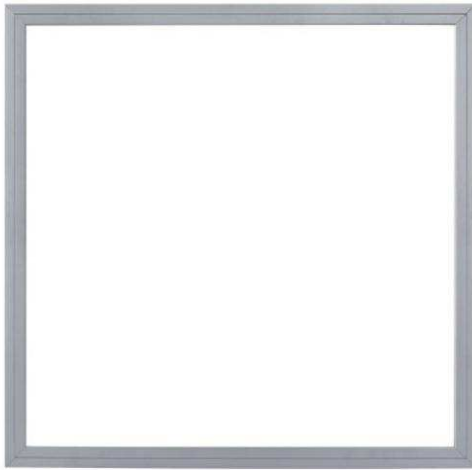


0-10vDimmable/Non-Dimmable



Features


- Material:Aluminum+PMMA
- Application Environment:-30°~+50°
- Service Life:≥50000H
- Input Voltage:AC100-277V
- Working Frequency:50-60Hz
- Beam Angle:120°
- CRI:≥80
- Power Factor:≥0.95
- Conversion Efficiency:≥0.88
- Warranty:5years

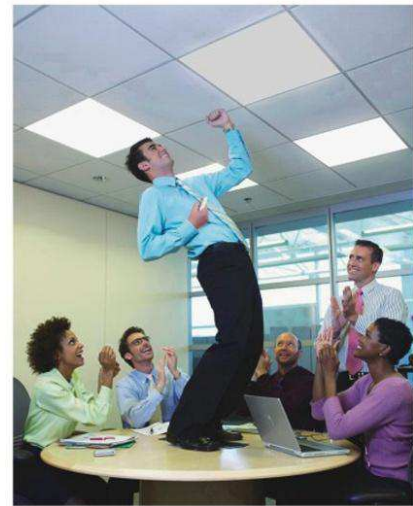

Specification

Model	Power (W)	Led type	CCT(K)	(LM)	N.W(g)	Size(mm)	Certification	Remark
ZS-PL2*2	30	2835/4014	3000-6500	2850	4500	604*604*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K
	36	2835/4014	3000-6500	3500	4500	604*604*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K
	40	2835/4014	3000-6500	3800	4500	604*604*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K
	45	2835/4014	3000-6500	4300	4500	604*604*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K
	50	2835/4014	3000-6500	4700	4500	604*604*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K
	55	2835/4014	3000-6500	5200	4500	604*604*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K

LED Panel Light 2*4

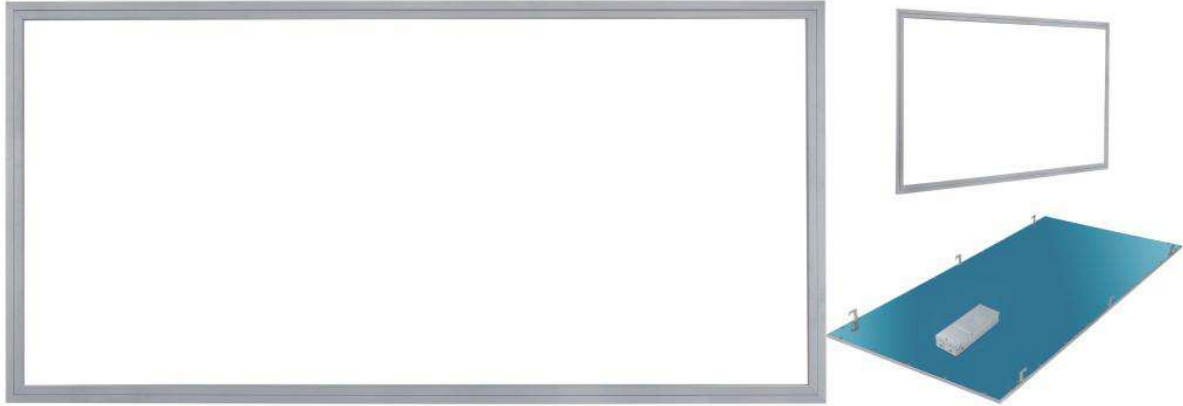

Features

- Material:Aluminum+PMMA
- Application Environment:-30°~+50°
- Service Life:≥50000H
- Input Voltage:AC100-277V
- Working Frequency:50-60Hz
- Beam Angle:120°
- CRI:≥80
- Power Factor:≥0.95
- Conversion Efficiency:≥0.88
- Warranty:5years

Specification

Model	Power (W)	Led type	CCT(K)	(LM)	N.W(g)	Size(mm)	Certification	Remark
ZS-PL2*4	55	2835/4014	3000-6500	5000	8000	604*1216*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K
	72	2835/4014	3000-6500	6500	8000	604*1216*10	ETL/CETL/UL/CUL/DLC	DLC:3000-5000K