


Up & down Linear light



Maximum overall	A	B	C
4FT	1180mm	58mm	72mm
8FT	2380mm	58mm	72mm



FEATURES

Input voltage: AC100-277V

Operating frequency: 50/60Hz

Power factor: ≥ 0.9

Ambient temperature range: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

THD: $<20\%$

IP Rating: IP20

Dimmable: 2.4G Bluetooth

Beam angle: 120°


Cover: Frosted

- Luminous Flux: $>130\text{ lm/w}$
- Color Temp: 3000-6500K
- 5 years' warranty

PARAMETER

Length (ft)	Product code	Certification	CRI	Wattage	Lumens 3000-6500K	Packing/carton	Weight/carton
4ft	ZS-LL1260G-3065	ETL/cETLus,	>80	6-60W	780-7800lm	1220x210x160mm 4pieces 1X40HQ Loading=6336PCS	9.5kg
8ft	ZS-LL24100G-3065	ETL/cETLus,	>80	10-100W	1300-13000lm	2405x210x165mm 4pieces 1X40HQ Loading=2816PCS	17.5kg


Product User Manual

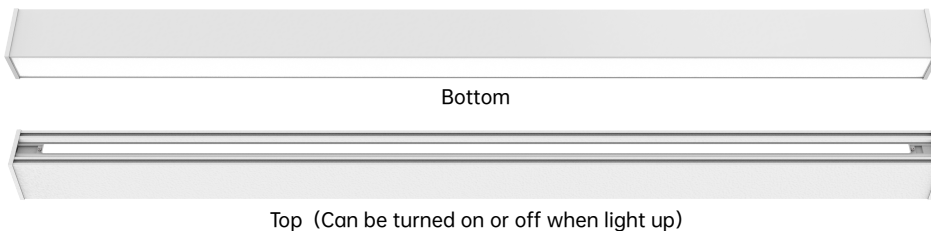

Product parameters:


Name: Up down linear light
Input voltage: AC100-277V 60/50Hz
Length(mm) and wattage: 1180mm 50W /2380mm 90W
Support platform: Android & iOS
Communication type: BLE&2.4G

Remote control instructions:

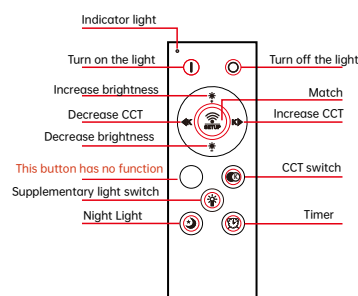

Before using the app to connect the lighting fixtures, please check the following:

- The Bluetooth has been turned on;
- Make sure the app is available on your phone app store;

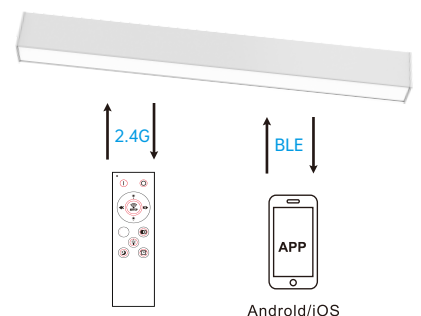

+1 281 840 8608
+1 833 927 2533


5755 Bonhomme Rd #412 Houston, TX 77036
10004 Gulf FWY, Houston, TX 77034

www.zaraled.com
info@zaraled.com

Pairing instructions:

NO.1: Remote control pairing

- The remote control needs two 1.5V and No. 7 batteries in order to function properly.
- Turn on the switch. When the light is on, press the pairing button in the middle of the remote control. If the light flashes twice, it means they are paired successfully.




NO.2: APP networking instructions

- Scan the QR code below, download the flash smart app and install it.




- Turn on Bluetooth on your phone

- Open the intelligent flashing app, Click on the plus sign on the top right corner, or click on 'Add Device' at the middle part of the app interface to add it.




- After clicking 'Add', follow the instructions in the app to add the device.


- Turn off and then turn on the switch, click the Repeat scan, and click add device.

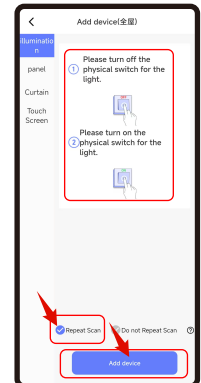


- Select the location of the product.

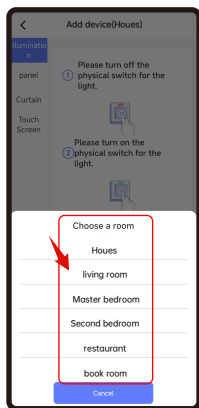


- Click confirm.

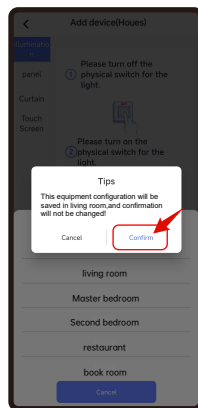

- Follow the instructions and turn off the switch for 5 seconds, then click next step.

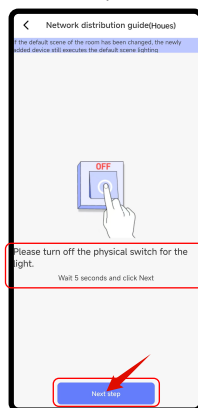


- After waiting the 5 seconds, turn on the switch, Click Start configuring network.

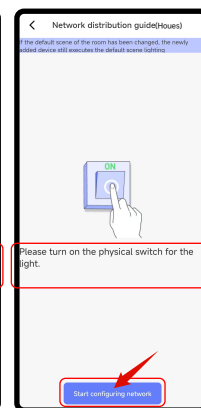


- Wait for the pairing process, click finish after pairing.



- After paired, click on the device bar to enter the control interface.

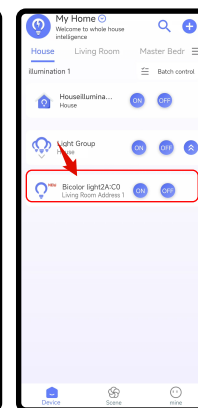


- This is the control interface. (The Main and the supplementary light control interface.)

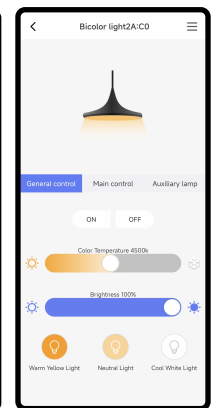


- Delete device.


- Supplementary light control interface.

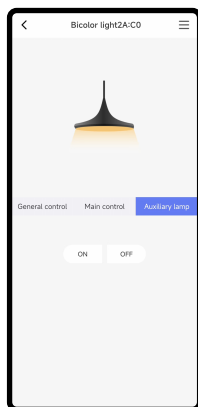


- Enter the control interface and click on the 'Device Details' icon

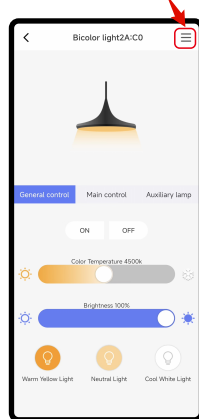


- Into 'Device Details' and click 'Device Delete'

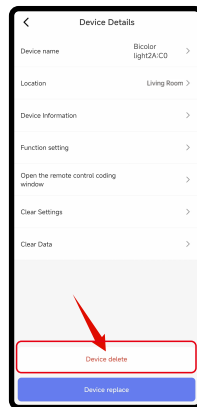

- Click 'confirm'.

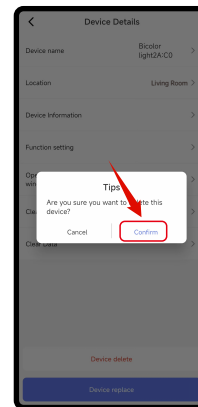

- Complete deletion.

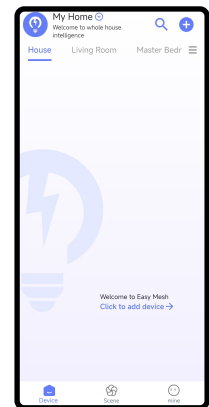


* The pictures in the manual are for display reference only. The actual room name in the APP can be modified according to the customer's preferences.



+1 281 840 8608
+1 833 927 2533

5755 Bonhomme Rd #412 Houston, TX 77036
10004 Gulf FWY, Houston, TX 77034

www.zaraled.com
info@zaraled.com








Electric Shock Attention

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTION



Suspension installation

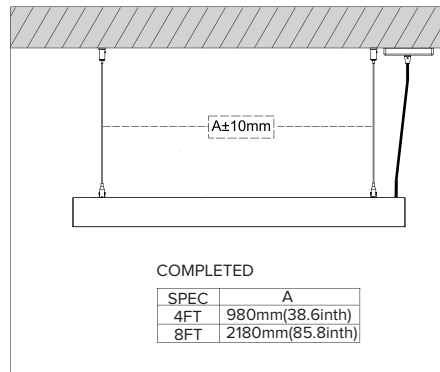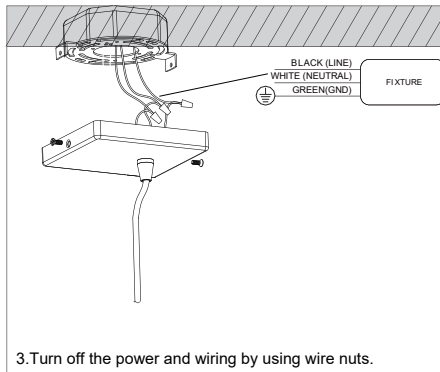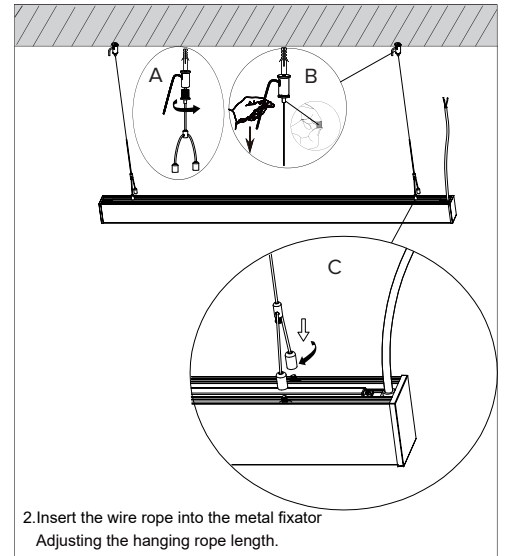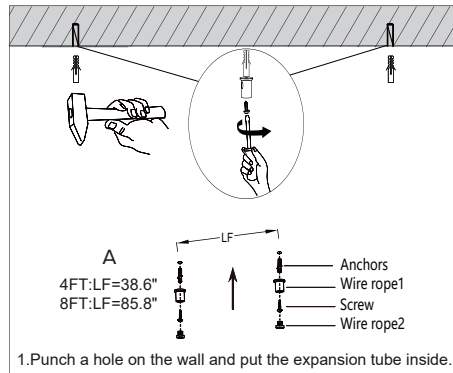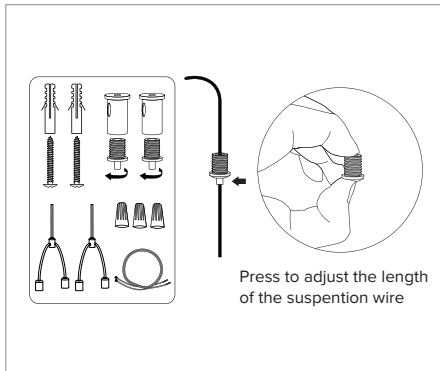

Warning

1. Please read the instructions carefully before installation.
2. Please make sure the power is off before installation.
3. The installation can only be done by certified electricians.
4. Product rated voltage is 100-277 Volts.
5. Please make sure voltage range meets the requirements
6. Please don't use chemicals to clean the lighting surface.

Link Pattern

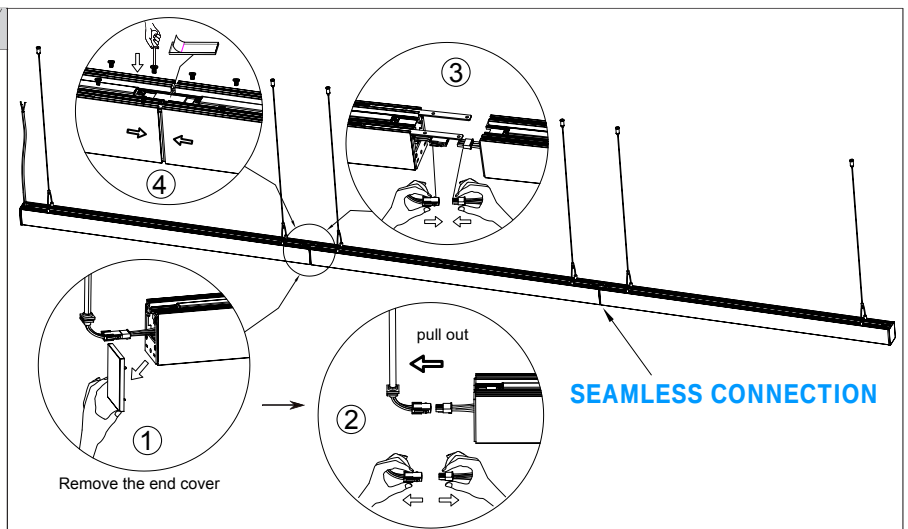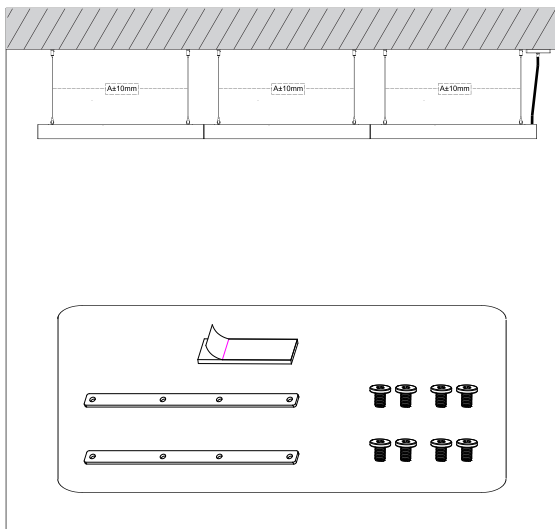


+1 281 840 8608
+1 833 927 2533


5755 Bonhomme Rd #412 Houston, TX 77036
10004 Gulf FWY, Houston, TX 77034

www.zaraled.com
info@zaraled.com


Surface-mounted installation

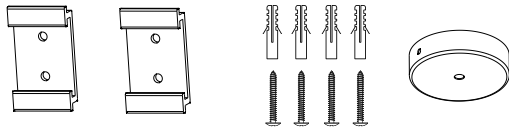


Ceiling-mounted accessories

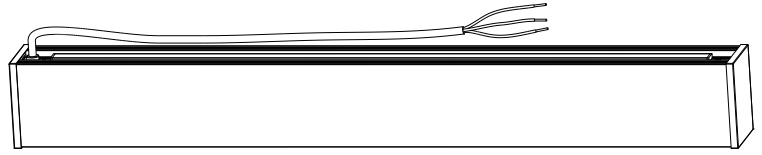


1. Mark the bracket install hole's position on the wall.

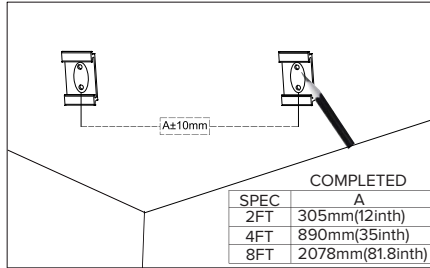


2. Punch a hole on the wall and put the expansion tube inside.

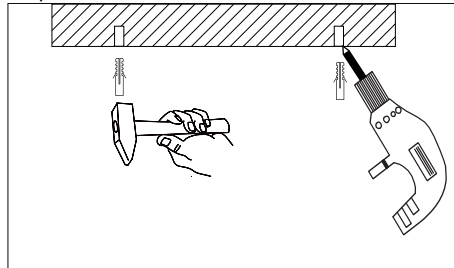


3. Drill the holes and screw the bracket on the wall.

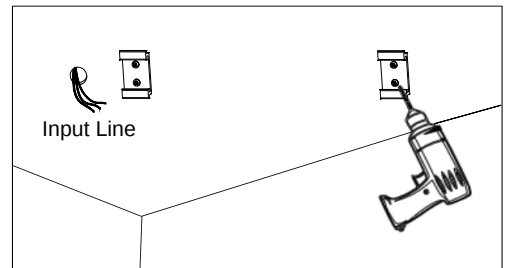

4. Align the top slots on both sides of the light fixture with the ceiling-mounted accessories and push them in.

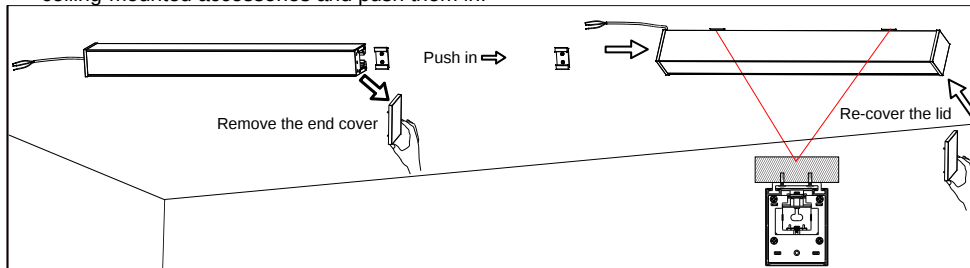

5. Turn off the power and wiring by using wire nuts. The installation completed.

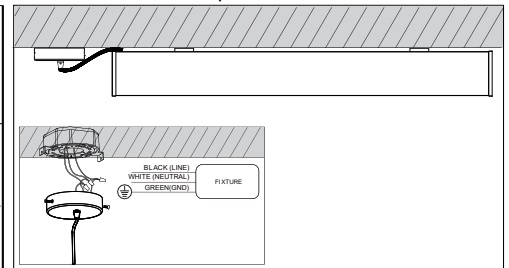

Link Pattern

