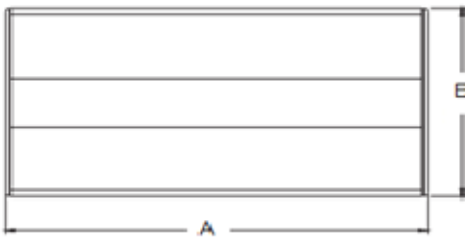


SPECIFICATION

LED Center Basket Troffer



Front View



Side View



Maximum Overall	A	B	C	Wattage:
2*4	47.76in	23.74in	1.77in	33w/40w/50w
2*2	23.74in	23.74in	1.77in	25w/35w

Input Voltage:	120-277V AC
Lumens:	130lm/w
Color Temperature:	4000K/5000K/6000K (3CCT)
Adjustable Wattage:	2*4: 33W/40W/50W 2*2: 25W/35W
Dimming:	0-10V
Operating Temperature:	-4F~+105F
Color Rendering Index:	>80
Lifespan:	Over 70% at 50000 Hours
PF:	0.95
Beam Angle:	110°
Environment Locations:	IP20 (Indoor Only)

Housing Material: Aluminum Heatsink for efficient heat dissipation.



Lamp Shell: White

PACKAGING

Fixture	Outer box (L*W*H)(In)	Qty/Ctn (pcs)	G.W/pcs(lbs)
2*4	49.6*4.13*25.79	2	31.9
2*2	25.79*4.13*25.79	2	17


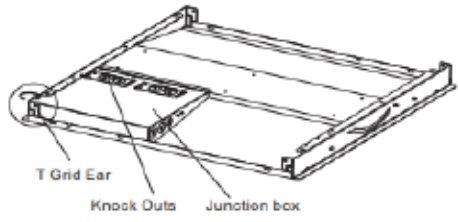
INSTALLATION

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.

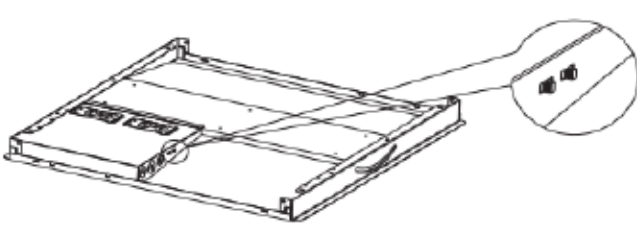
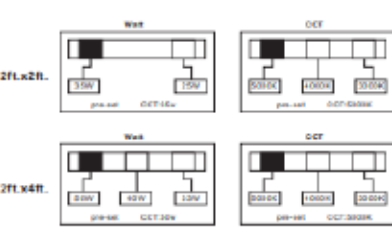



1. Bring the TRCB Troffer into the T bar ceiling panel.
2. Bend T-grid ears over the top of the T bar ceiling.

Fold the hook up with 90°

Adjusting the switch, and making the switch fix on the needed Watt and CCT.
Adjustable watt is 2x2ft: 25W/35W, 2x4ft: 33W/40W/50W, Adjustable CCT is 3000K/4000K/5000K.

WIRING GUIDE

1. Wire input end of the LED driver to supply wires using connector according to wiring section. Wire connections must be insulated.
2. Connect the BLACK/BROWN lead to LINE(+) supply lead.
3. Connect the WHITE/BLUE lead to NEUTRAL/Common (-) supply lead.
4. Connect the GREEN lead to GROUND supply lead.
5. If any, connect PURPLE/BLUE to 0-10V SIGNAL supply lead and GREY/WHITE to 0-10V NEUTRAL/REFERENCE supply lead.

WIRING DIAGRAM

