










DIMENSIONS







P/N:AST-SWP08M-120WXYZA1-abcd

Note:

AST=Company Name;

SWP08=Product series, LED Wall Pack;

M=Product size,M=medium;

120=Rating Power;

W=dirver manufacturer,W=Weledpower;

X=LED manufacturer,B=lumileds;

Y=Cover type,SP=stripe PC;

Z=LED module type, S=single CCT;

A=Input voltage, 120-277VAC;

1=Version number;

"a" can be any two letters to represent lamp colors;

"b" can be "S" or blank for Surge-Protective Device provided or not;

"c" can be "W" or blank for dimming module provided or not;

"d" can be any digits for CCT;

ADVANTAGE

- UL, cUL, certificate
- Lumileds 2835, high CRI.
- ➤ Input voltage 120-277VAC .
- Output constant current lever can be adjusted through output cable with 0-10V.
- > No UV or IR in the beam.
- Wattage abjustable.
- Easy to install and operate.
- > Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.

APPLICATION

- Entrance lighting, courtyard lighting;
- Industrial lighting, Outdoor landscape lighting;
- Building, The hotel;
- Wall lighting area and so on.

5755 Bonhomme rd, Suite 412 Houston, Texas 77036 Office: 281-840-8608 www.zaraled.com



SPECIFICATIONS

	Input Power (Tolerance : ±10%)	120W		
	Color Temperature	2700-3500K	4000-6500K	
	Lumen (Tolerance : -10%)	14000-14800LM/W	15000-15800LM	
	Efficacy (Tolerance : -3%)	120-125LM/W	130-135LM/W	
OPTICAL	CRI	>80		
	Color Consistency	<6 Steps (or <6 SDCM)		
	BUG	B2-U2-G2		
	Diffuser Type	PC		
	Beam Angle (50%) (Tolerance : ±15%)	105 Degree		
	Input Voltage and Frequency	120-277VAC 50/60Hz		
	PF (Tolerance : -3%)	≥0.9		
	THD (Tolerance : +5%)	≤20%		
	Flicker Percent	<30%		
ELECTRICAL	Driver Brand Weledpower Driver Model WP-CNB-120U-1A2SCPO-Z-PRO			
ELECTRICAL				
	Driver Surge protection	L-N: 4kV , L&N-E: 6kV		
	Dimming	0-10V dimming standard		
	Sensor Type	No Sensor		
	Optional Accessory	Surge-protective Device, Photocell		
	LED Brand	LUMILEDS		
	LED Type SMD 2835 LED QTY 336 PCS Housing Die-cast aluminum Housing Color All Color			
MATERIALS				
WATERIALS				
	Waterproof Rating	WET (IP65)		
OTHERS	Operating Temperature	-40℃ TO 45℃		
	Storage Temperature	-40℃ TO 80℃		
	Operating Humidity	20% - 90% RH		
	Storage Humidity	10% - 95% RH		
	Warranty	5 years warranty with 24/7 operating hours Luminaire lifetime at 25 $^{\circ}\mathrm{C}$.		

ACKAGE


	Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Inner box	257*140*350MM	1 PCS	2.3KG	2.8KG
Outer box	300*277*374MM	2 PCS	4.6KG	6KG

Tolerance of Carton Size: ± 15 MM, Tolerance of Weight: $\pm 10\%$.



ZARA LED 5755 Bonhomme rd, Suite 412 Houston, Texas 77036 Office: 281-840-8608 www.zaraled.com



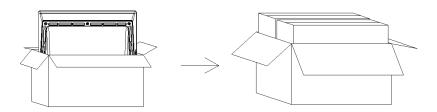



LIGHT DISTRIBUTION TESTING PARAMETERS

Test:U:120.07V I:0.9724A P:116.51W PF:0.9979 Freq:60.01Hz		
Lamp Flux:15557.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP PHOTOMETRIC DATA Eff: 133.53		3.53 lm/W				
MODEL			Imax (cd)	6480	S/MH(CO/180)	1.19
NOMINAL P	OWER (W)	120	LOR(%)	100.0	s/MH(C90/270)	0.71
RATED VOL	TAGE (V)	120	TOTAL FLUX(lm)	15557	η UP,DN(CO-180)	9.1,70.6
NOMINAL F	LUX (lm)	15557.4	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.6,19.6
LAMPS INSIDE 1		1	η up(%)	9.7	CIBSE SHR NOM	1.00
TEST VOLT	AGE (V)	120	η down(%)	90.3	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

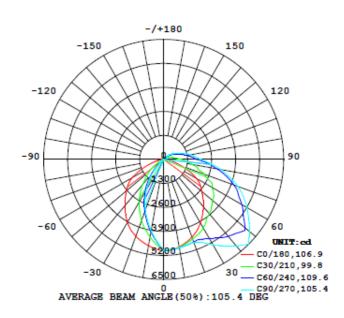

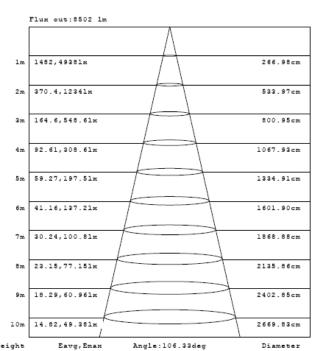

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

NOTICE FOR USER

Please turn off power before install or change assembly parts.



5755 Bonhomme rd, Suite 412 Houston, Texas 77036 Office: 281-840-8608 www.zaraled.com



LED Wall Pack


Page 4 of 4

- ➤ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.

SPECIAL FUNCTIONS INSTRUCTION:



Wattage adjustable instruction

Turn the wattage adjustable knob to a certain wattage gear, the power of the lamp will change to the corresponding wattage.

Adjustable wattage range 25%-100%.

Note: Please turn off the power before adjusting the wattage.



5755 Bonhomme rd, Suite 412 Houston, Texas 77036 Office: 281-840-8608 www.zaraled.com