
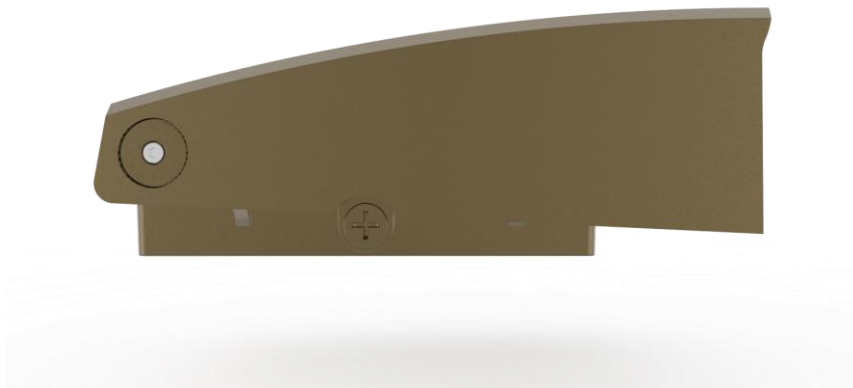


# SPECIFICATION SHEET

## Low Profile Wall LED LIGHT

ITEM NO.:

SL-WPQS-30WC  
SL-WPQS-40WC  
SL-WPQS-60WC  
SL-WPQS-80WC  
SL-WPQS-100WC  
SL-WPQS-120WC

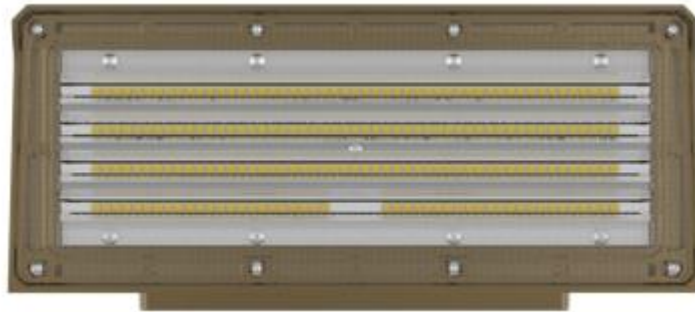

Max.8M




Light Sensor




Hold Time  
10s~+∞



Mounting Height  
15 m Max.



Cluster-control  
Version




Automatic  
Dimming



5 Years  
Guarantee

## LED WALL PACK LIGHT



### Low profile design to complement any building exterior

The Low Profile Wall Mount features a discreet design that will complement any building exterior. Three sizes are available in 30,40,60,80,100 and 120W output to accommodate multiple mounting heights. Low Profile Wall light delivers up to 120 lumens per watt for excellent energy savings over HID.

### Benefits

- Low profile design complements surroundings
- Full cutoff performance for optimal illumination
- Easy mounting for simple installation
- Long life and reduced maintenance


### Features

- Energy saving LED technology
- Available in three sizes to accommodate multiple mounting heights
- Architectural bronze finish
- 5 year limited warranty


### Applications

- Walkways
- Security Lighting
- Bridges, Monuments, Facades
- Residential


# LED WALL PACK LIGHT



## Usage scenario

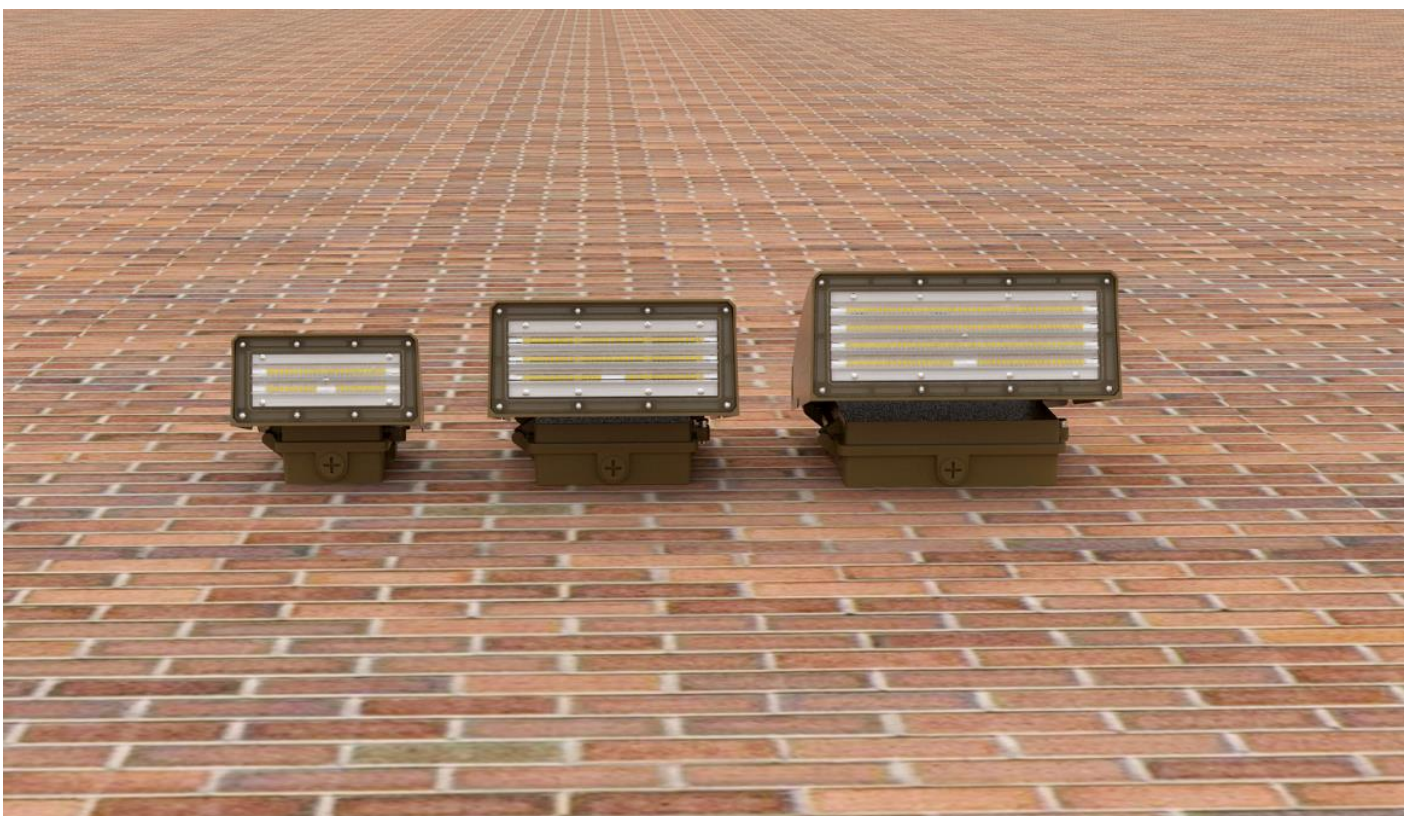


LED WALL PACK LIGHT



Line-Up

Model No.	Watts(W)	Luminaire Efficacy	Dimension(mm)	LED type	Light Color(K)	Beam Angle(Degree)
SL-WPQS-30W	30	120LM/W	205 * 165 * 98	3030	4000K~5700K	60*85
SL-WPQS-40W	40	120LM/W	205 * 165 * 98	3030	4000K~5700K	60*85
SL-WPQS-60W	60	120LM/W	280 * 210 * 110	3030	4000K~5700K	60*85
SL-WPQS-80W	80	120LM/W	280 * 210 * 110	3030	4000K~5700K	60*85
SL-WPQS-100W	100	120LM/W	330 * 267 * 124	3030	4000K~5700K	60*85
SL-WPQS-120W	120	120LM/W	330 * 267 * 124	3030	4000K~5700K	60*85

DRAWING

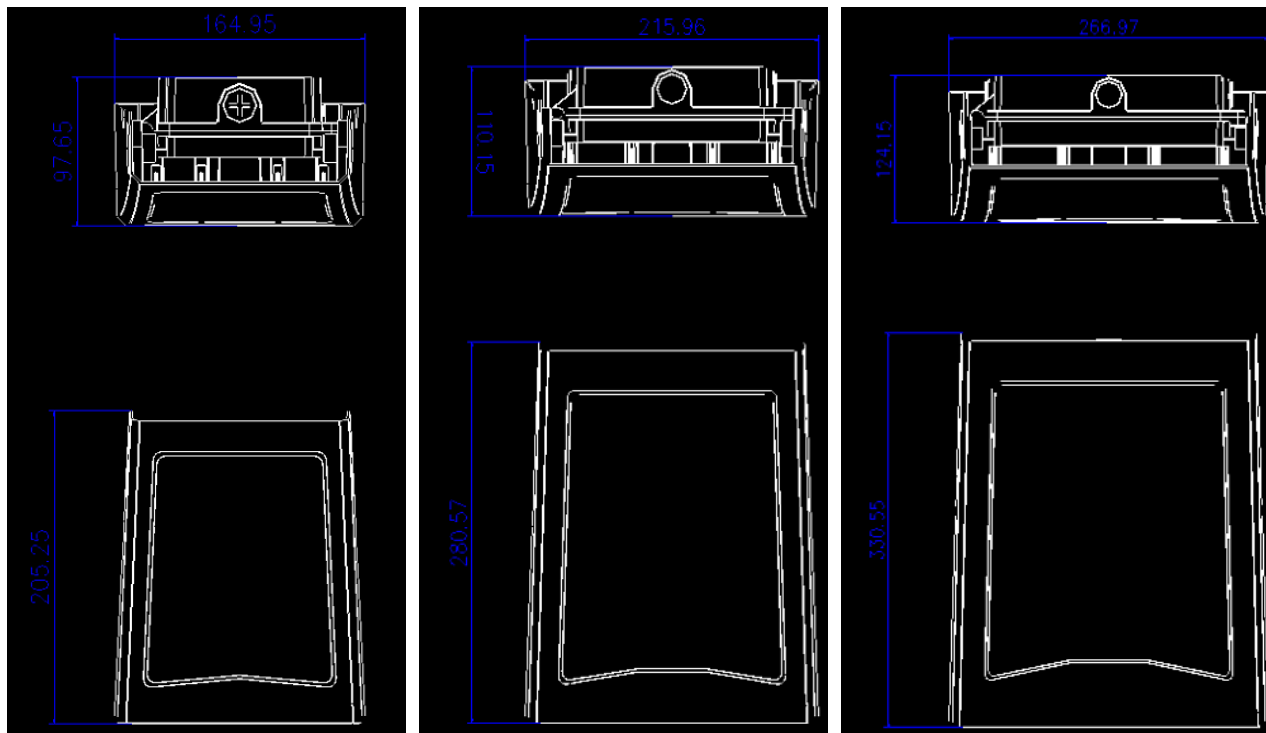


Environmental Requirements

Specifications	Values
Operational Temperature Range	-40~40°C
Preservation Temperature Range	-40~90°C
Operational Humidity Range	95%Rh or below (@-20~40°C)
Installation Area	Outdoor (Counter,Residential,Commercial,etc)


Ver:0.01



# LED WALL PACK LIGHT




## Mounting height guide

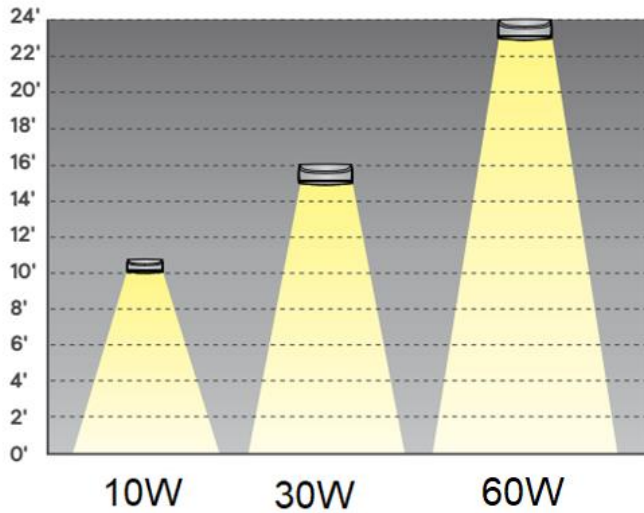

## Optical distributions

30W at 15' mounting height.

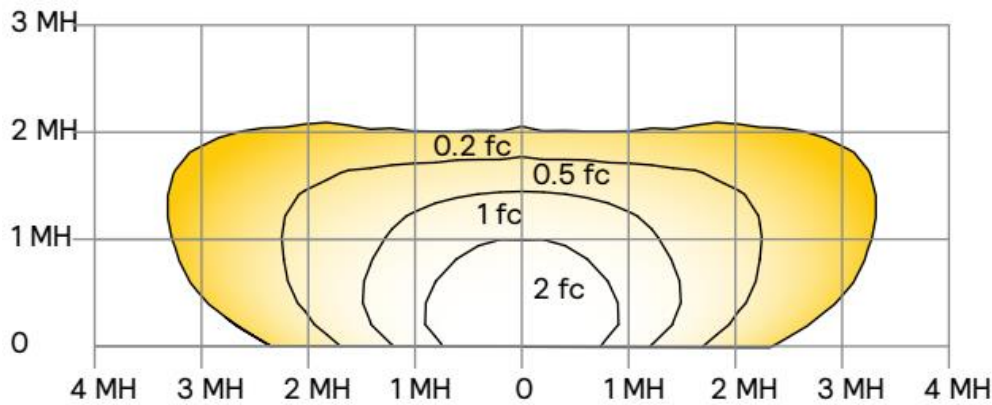

60W at 20' mounting height.

