

Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

DESCRIPTION

The lamp has a modern design, with a brushed iron nickel plating double ring design and a white frosted acrylic diffuser, perfect solution for commercial applications.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Available in 12", 14" and 16".

Suitable for residential housings, condominiums, business building, hotel and hospitality industry.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
12FMCT16DR05BN	16W	2700K	1034Lm
		3000K	1039Lm
		3500K	998Lm
		4000K	943Lm
		5000K	896Lm

MODEL#	WATTAGE	5CCT	LUMENS
14FMCT20DR05BN	20W	2700K	1429Lm
		3000K	1471Lm
		3500K	1501Lm
		4000K	1418Lm
		5000K	1339Lm

MODEL#	WATTAGE	5CCT	LUMENS
16FMCT24DR05BN	24W	2700K	1604Lm
		3000K	1670Lm
		3500K	1710Lm
		4000K	1624Lm
		5000K	1556Lm

FEATURES

- Emits evenly, without halo and shadow
- Fit 2.75"/3.5" J-Box
- Easy to install

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.


TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	Iron+PS
FINISH	Brushed Nickel
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited



Catalog Number: Project Name: Note: Date: Type:

EASILY FLIP THE SWITCH FOR DESIRED CCT



PRODUCTS VIEW



SURFACE MOUNTING INSTALLATION

1. Remove the bolt



2. Connect the wire, screw on the screw



3. Install the lampshade



4. Install the frame






5. Turn on the lights



6. Turn off the lights



DIMENSION

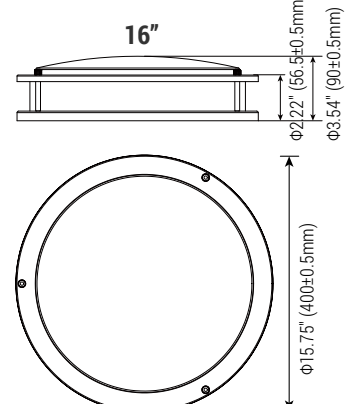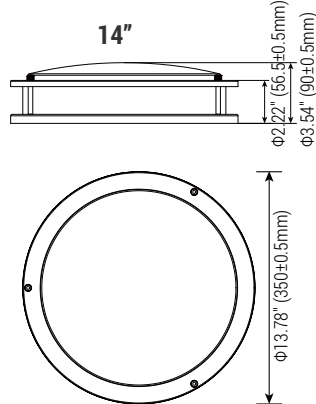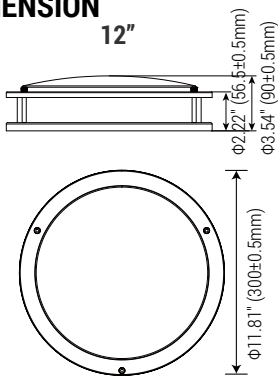

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06