

SPECIFICATION SHEET


WET LOCATION LED EMERGENCY EXIT

Features:

- Injection-molded thermoplastic ABS housing and polycarbonate cover, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6 height with 3/4 stroke. Red letters.
- Single or double face (Universal). Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Built-in 3.6V 500mAh Ni-Mh battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° C to 40° C outdoor wet location listed.
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.



Dimension

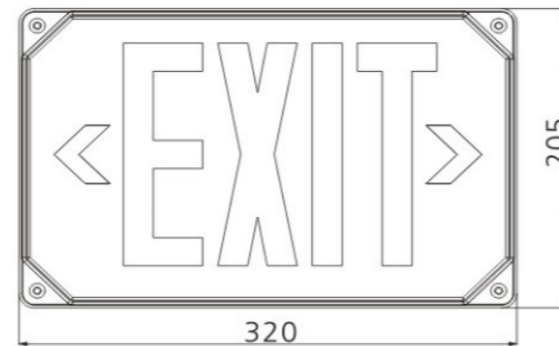


Model No.	JLWPEE1RW JLWPEE2RW
The AC voltage	120/277V / 60Hz
Input power	2.9W-3.59W
AC charging current	0.026mA-0.015mA
Battery	3.6V 500mAh Ni-Mh
Discharge time	180mins
Charging time	24h
Luminous flux(AC)	8.4641 lm
Color temperature(AC)	1001K
Packing information	44x34x24cm/6pcs 9.0/8.0kgs

SPECIFICATION SHEET

WET LOCATION LED EMERGENCY EXIT

AC Spectra:

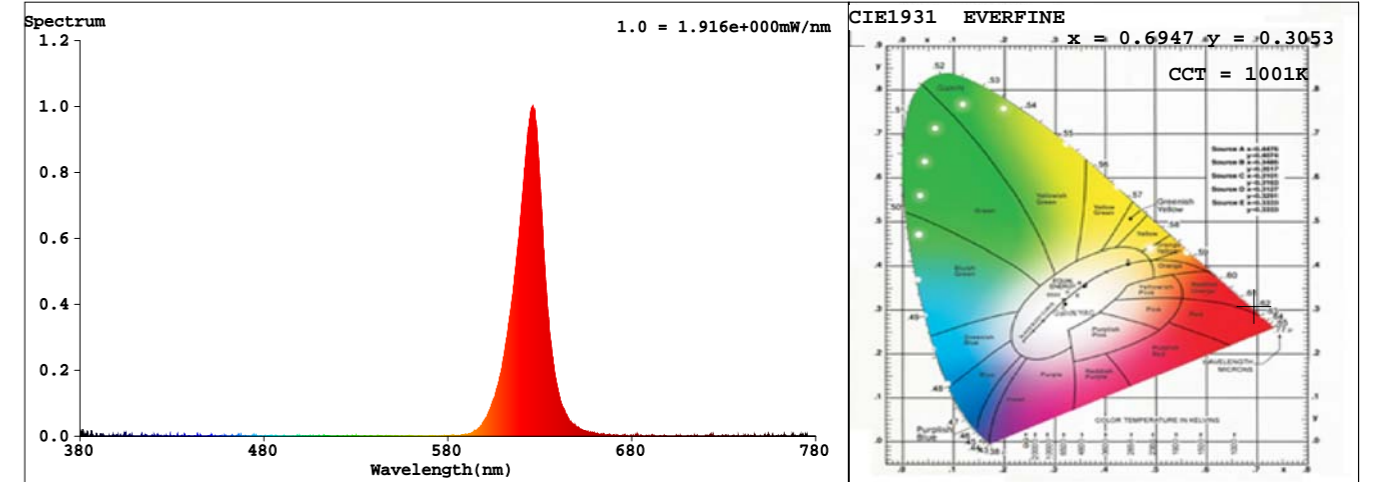

Spectral Distribution

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.6947$ $y = 0.3053$ / $u' = 0.5269$ $v' = 0.5210$ ($duv = -7.34e-02$)
 CCT= 1001K Prcp WL: Ld=621.6nm Purity=100.0%
 Peak WL: Lp=626nm FWHM: =16.1nm Ratio:R=98.4% G=1.7% B=-0.1%
 Render Index: Ra = 2.2
 R1 =-5 R2 =74 R3 =22 R4 =-44 R5 =-15 R6 =85 R7 =-6
 R8 =-94 R9 =-267 R10=65 R11=-33 R12=73 R13=21 R14=54 R15=-52


Photometric & Radiometric Parameters

Flux = 8.4641 lm Eff. : 2.37 lm/W Fe = 36.418 mW

Electrical parameters

V = 277.1 V I = 0.01554 A P = 3.570 W PF = 0.8291 F=49.99 Hz

DC Spectra:

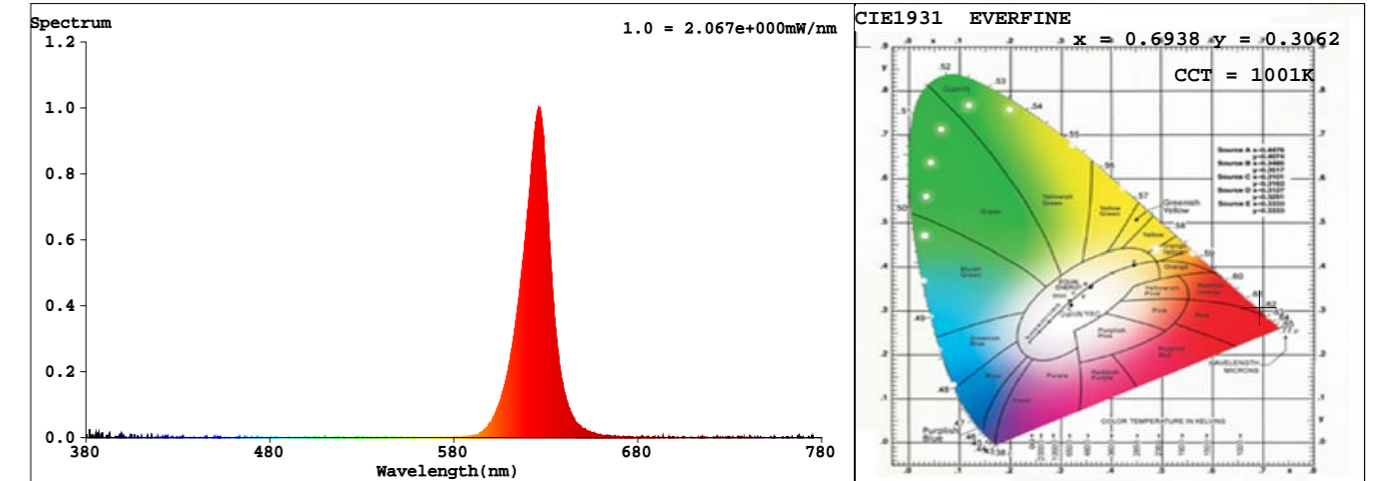

Spectral Distribution

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.6938$ $y = 0.3062$ / $u' = 0.5250$ $v' = 0.5213$ ($duv = -7.32e-02$)
 CCT= 1001K Prcp WL: Ld=621.1nm Purity=100.0%
 Peak WL: Lp=627nm FWHM: =16.3nm Ratio:R=98.2% G=1.9% B=-0.1%
 Render Index: Ra = 4.2
 R1 =-2 R2 =76 R3 =23 R4 =-41 R5 =-11 R6 =87 R7 =-6
 R8 =-92 R9 =-262 R10=67 R11=-29 R12=76 R13=24 R14=55 R15=-50

Photometric & Radiometric Parameters

Flux = 9.1114 lm Eff. : 0.00 lm/W Fe = 39.616 mW

Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 0 F=0.00 Hz

