

# **Square Slim Panel Series**

5CCT Square Slim Panel

Catalog Number: Project Name: Note: Date: Type:



| BASED ON SAMPLE SETTING.ACTUAL LUMENS MAY VARY. |       |         |   |   |
|---|-------|---------|---|---|
| MODEL#  | SIZE  | WATTAGE | 5CCT                                      | LUMENS                                    |
| 4EJCT09SS05                                     | 4inch | 9W      | 2700K<br>3000K<br>3500K<br>4000K<br>5000K | 525Lm<br>561Lm<br>587Lm<br>600Lm<br>588Lm |
| MODEL#  | SIZE  | WATTAGE | 5CCT                                      | LUMENS                                    |
| 6EJCT12SS05                                     | 6inch | 12W     | 2700K<br>3000K<br>3500K<br>4000K          | 840Lm<br>870Lm<br>886Lm<br>901Lm          |

| TECHNICAL SPECIFICATION |                                      |  |
|-------------------------|--------------------------------------|--|
| VOLTAGE                 | 120V                                 |  |
| POWER FREQUENCY         | 60Hz                                 |  |
| POWER FACTOR            | >0.9                                 |  |
| 5CCT                    | 2700K   3000K   3500K  4000K   5000K |  |
| CRI                     | 90                                   |  |
| BEAM ANGLE              | 120°                                 |  |
| MATERIAL                | PS+AL                                |  |
| LIFESPAN                | ≥50,000hours                         |  |
| OPERATING TEMP          | (-4°F~ 122°F) -20~40℃                |  |
| DIMMABLE                | Triac Dimming                        |  |
| RATING                  | Suitable for Wet Locations           |  |
| WARRANTY                | 5 year limited                       |  |











## **FEATURES**

- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- · Instant on
- No flicker

### **INSTALLATION**

No existing recessed housing or junction box required. Suitable for most new constructions. Install J-Box in ceiling beam, and insert light right into drywall opening.

#### **DIMMING**

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

#### **ELECTRICAL**

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

#### **ENERGY SAVINGS**

80% more energy savings than halogen lamps.

#### LISTING

ETL Listed. Energy Star.





# **Square Slim Panel Series** 5CCT Square Slim Panel


Catalog Number: Project Name: Note: Date: Type:

4inch&6inch: Easily flip the switch for desired CCT


Products view



#### **SIZE & DIMENSION & HOLE SIZE**

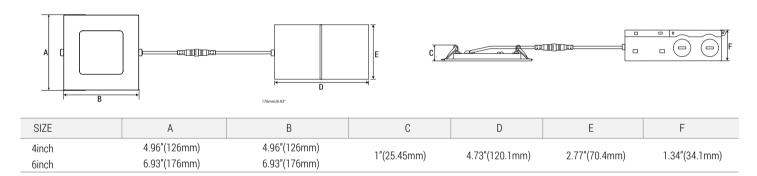

| SIZE  | HOLE SIZE       |
|-------|-----------------|
| 4inch | 4 21/64"(110mm) |
| 6inch | 6 19/64"(160mm) |




# **RECOMMENDED DIMMER**

| LUTRON                                      |   |                                      | LEV                           | LEVITON               |                            |
|---|---|--------------------------------------|-------------------------------|-----------------------|----------------------------|
| TG-600PR-WH<br>S-600PR-WH<br>CTCL-153PDH-WH | TGCL-153PH-LA<br>SLV-600P-AL<br>DV-600PR-WH | SCL-153PH-WH<br>GT-600P<br>DVCL-153P | RNL06<br>MSCL-OP153M<br>IPL06 | 6672<br>6674<br>DSL06 | PD-6WCL<br>MACL-153M//MA-R |

| ACCESSORIES |                  |          |  |
|-------------|------------------|----------|--|
| PART        | DESCRIPTION      | QUANTITY |  |
| Α           | J-Box driver     | 1        |  |
| В           | Connector        | 3        |  |
| С           | Hole cutout card | 1        |  |









5755 Bonhomme rd, Suite 412 Houston, Texas 77036 Office: 281-840-8608 www. zaraled. com