







DIMENSIONS

Pendent



Surface-mounted



P/N: AST-HB23-240WS1XYA1-abcdWSg

Note:

AST= Company name;

HB23 = Product series, LED High Bay Light;

240W= Rating Power;

S1 =Driver manufacturer, Sosen CNL-E series;

"X" can be any alphabet for manufacturer of LED;

"Y" can be "T1-T9" "CP" for Diffuser type;

A1= Version number;

"a" can be any two letters to represent lamp colors; BH=Black, WH=White, or Customized;

"b" can be "S" or "EM" or blank for Surge-protective Device provided or Emergency Driver or not;

"c" can be "M" or blank for Motion microwave Sensor, provided or Motion PIR sensor or not

"d" can be any digits for CCT, 35-65K(3500K-6500K)

"W" Stand for wattage tunable

"S" stand for color untunable

"g" can be "RP", "RA" or blank for Thermoplastic shade, aluminum shade provided or not.

ADVANTAGE

- UL cUL certificate.
- Lumileds or Samsung Chip, high CRI.
- Input voltage 120-277VAC.
- Output constant current lever can be adjusted through output cable with 0-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO humming.
- Green and eco-friendly without mercury.

APPLICATION

- Warehouse, factory and workshops;
- Highway toll station and gas station;
- Exhibition hall;
- Gymnasium and supermarkets, etc.


SPECIFICATIONS

OPTICAL	Input Power (Tolerance : $\pm 10\%$)	240W (wattage adjustable :25%-100% or 240W/200W/150W)
	Color Temperature	3500K-5700K
	Lumen (Tolerance : -10%)	34500-37000LM
	Efficacy (Tolerance : -3%)	145-155LM/W
	CRI	>80
	Color Consistency	<6 Steps (or <6 SDCM)
	UGR	<28 (X=4H, Y=8H; S/H=1; Reflectances: 70%/50%/20%)
	Diffuser Type	PC Lens
	Beam Angle (50%) (Tolerance : $\pm 15\%$)	90 Degree
ELECTRICAL	Input Voltage and Frequency	120-277VAC, 50/60Hz
	PF (Tolerance : -3%)	≥ 0.9
	THD (Tolerance : +5%)	$\leq 20\%$
	Flicker Percent	<5%
	Driver Brand	Sosen Driver (0-10V dimming)
	Driver Model	SS-240CNL-E260BHB
	Driver Surge protection	L/N-PE: 6kV, L-N: 6kV
	Dimming	0-10V dimming standard(off)
	Optional Accessory	Motion microwave Sensor, PIR motion sensor , Surge-protective Device,Wire guard,Reflector shield
MATERIALS	LED Brand	Lumileds
	LED Type	SMD2835
	LED QTY	640PCS
	Housing	Die-cast aluminum
	Housing Color	Black, White, or Customized
	Waterproof Rating	WET (IP65)
OTHERS	Operating Temperature	Without Motion Sensor: -40℃ TO 50℃
		With Motion Sensor: -30℃ TO 50℃
	Storage Temperature	-40℃ TO 80℃
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	Warranty	5 years

PACKAGE

Lamp Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
Pendent	330*330*145MM[11.61*11.61*5.71inch]	1PCS	2.7KG[5.95LBS]	3.2KG[7.05LBS]
Surface-mounted	330*330*145MM[11.61*11.61*5.71inch]	1PCS	3.1KG[6.83LBS]	3.6KG[7.94LBS]

Tolerance of Carton Size: ± 15 MM[± 0.59 inch], Tolerance of Weight: $\pm 10\%$.



LIGHT DISTRIBUTION TESTING PARAMETERS

Luminaire Property

Luminaire Manufacturer:

Voltage: 121.7 V

Power: 246.00 W

Current: 2.026 A

Power Factor: 0.998

Photometric Results

CIE Class: Direct

Measurement Flux: 38018.1 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(10%,50%): H123.4,H82.4

Vertical Diffuse Angle(10%,50%): V122.3,V79.6

Luminaire Efficacy Rating (LER): 154.60

Max. Intensity: 21527.82 cd

S/MH(C0/C180): 1.26

Total Rated Lamp Lumens: 38018.1 lm

Efficiency: 100%


Upward Ratio: 1%

Central Intensity: 21503.69 cd


Pos of Max. Intensity: H22.5 V5

S/MH(C90/C270): 1.21

Luminous Intensity Distribution Curve

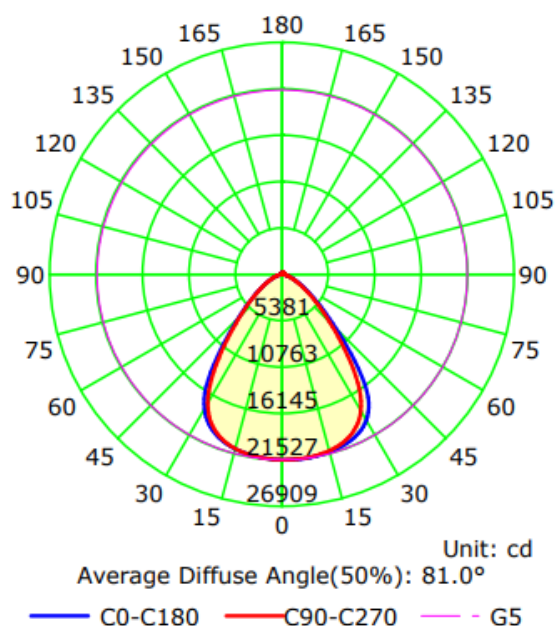

The Average Illuminance Effective Figure

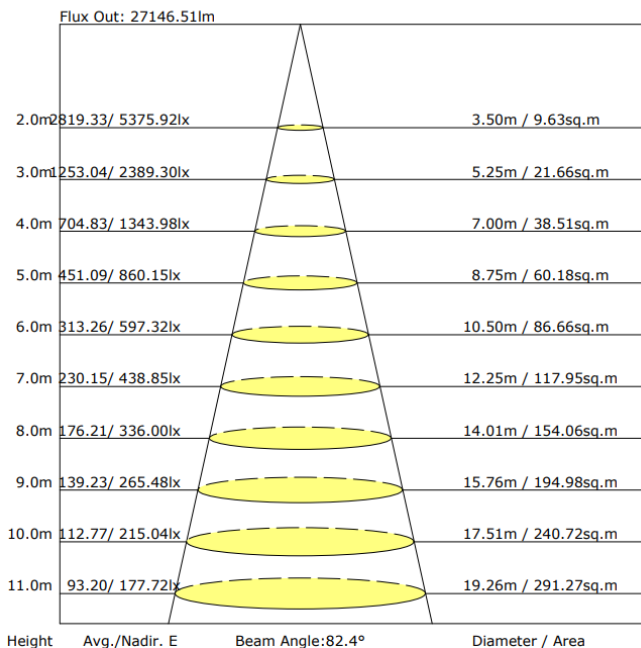

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.

