



Gimbal Retrofit Kit Series

5CCT Gimbal Retrofit Kit Downlight

Catalog Number : Project Name : Note : Date : Type :

DESCRIPTION

With a swiveling lens, this LED Gimbal Downlight offers the ability to focus light on artwork, walls, and sculptures in your home or office. Tilt the optic 60° and swivel a full 360°.

Light to 2700K warm white, 3000K soft white, 3500K natural white, 4000K cool white, or 5000K bright white.

This fixture is suitable for most new construction, remodeling, and shallow recessed lighting housings.

Suitable for damp locations. Ideal for kitchen, family room, bedroom, bathroom, and common areas in your home or office.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
4HVCT10GRWH	10W	2700K	634Lm
		3000K	676Lm
		3500K	708Lm
		4000K	720Lm
		5000K	677Lm

MODEL#	WATTAGE	5CCT	LUMENS
6HVCT16GRWH	16W	2700K	1018Lm
		3000K	1070Lm
		3500K	1168Lm
		4000K	1193Lm
		5000K	1077Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	AL+PC
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

FEATURES

- Retrofits in existing incandescent can housing
- E26 screw base adapter connects directly to standard socket
- 90+ CRI, superior color rendering performance
- with an E26 base adapter and spring clips, which makes the installation extremely easy

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

INSTALLATION

Easy installation with universal E26 connectors. Fit 4", 6" compatible housings.

LIFESPAN

This luminaire is built with the highest quality 120V drivers, ensuring energy efficiency. With a lifespan of 50,000 hours, it can last decades under normal operation!

LISTING

ETL Listed. Energy Star. Title24.



Specification subject to change without notice




Gimbal Retrofit Kit Series


5CCT Gimbal Retrofit Kit Downlight

Catalog Number : Project Name : Note : Date : Type :


Maximum angle in vertical direction: 60°

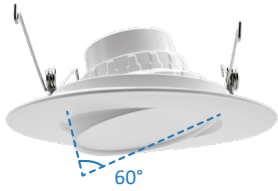





Maximum angle in horizontal direction: 360°

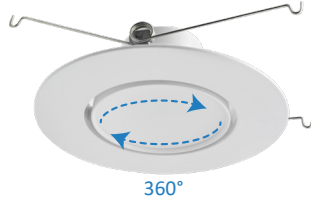

Selectable 5CCT: 2700K,3000K,3500K,4000K,5000K

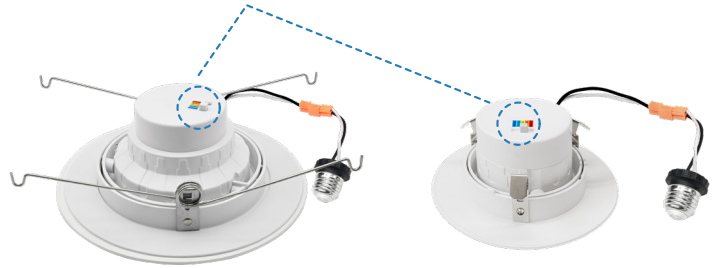

SIZE & DIMENSION

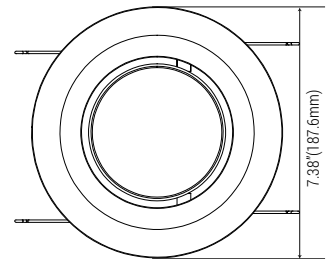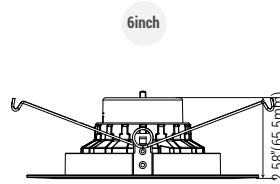

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06

BLACK TRIM OPTION



ACCESSORIES



E26 Adapter

Specification subject to change without notice