

Catalog Number :

Project Name :

Note :

Date :

Type :

DESCRIPTION

Ultra slim design, lamp thickness only 0.39".

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Easy Installation, no housing needed.

Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.

Available size: 3", 4", 6", 8"

3-4-6-8"



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-3EJCT06SR05	3inch	6W	2700K	364Lm
			3000K	371Lm
			3500K	381Lm
			4000K	394Lm
			5000K	378Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-4EJCT09SR05	4inch	9W	2700K	562Lm
			3000K	613Lm
			3500K	637Lm
			4000K	644Lm
			5000K	602Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-6EJCT12SR05	6inch	12W	2700K	936Lm
			3000K	996Lm
			3500K	1038Lm
			4000K	1041Lm
			5000K	998Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
KOK-8EJCT18SR05	8inch	18W	2700K	1442Lm
			3000K	1488Lm
			3500K	1504Lm
			4000K	1474Lm
			5000K	1409Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	>0.9
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	PS+AL
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F ~ 113°F) -20-45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

FEATURES

- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- Instant on
- No flicker

INSTALLATION

No existing recessed housing or junction box required.

Suitable for most new constructions.

Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. Energy Star.



ZARA LED
BE BRIGHTER • BE SAFER • LAST LONGER

10004 Gulf Fwy, Houston, TX 77034 +1 281 840 8608
5755 Bonhomme Rd, Houston, TX 77036 +1 833 927 2533


Catalog Number : Project Name : Note : Date : Type :

3inch & 4inch & 6inch & 8inch : Easily flip the switch for desired CCT

Products view



SIZE & DIMENSION

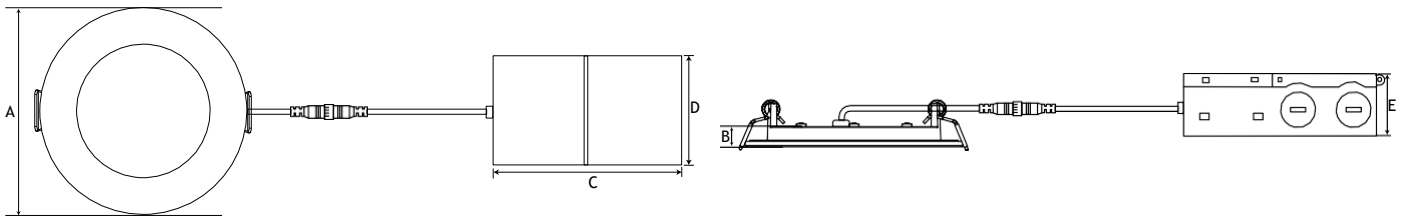


SIZE	A	B	C	D	E
3inch	Φ3.62"(92mm)	0.39"(9.9mm)	3.94"(100mm)	2.68"(68mm)	1.34"(34mm)
4inch	Φ4.92"(125mm)	0.39"(9.9mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	Φ6.89"(175mm)	0.39"(9.9mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
8inch	Φ8.82"(224mm)	0.39"(9.9mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06


SIZE	HOLE SIZE
3inch	3 5/64"(78mm)
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)
8inch	8 5/64"(205mm)



J-Box driver



Connector



Hole cutout card