

# Backlit LED Panel Light

CCT & Wattage Adjustable Panels

## DESCRIPTION

2' x 2' / 2' x 4' Backlit LED Panel Light | Wattage Selectable | CCT Adjustable | 0-10V Dimming

### The build

Durable solid frame, prefabricated paint with matte white finished. Slim profile design. Integrated T-Bar mounting clips. Easy installation.

### ELECTRICAL

Built with the highest quality driver that is Universal Voltage(100V-277V), the fixture uses long lasting, highly-efficient LEDs.

### DRIVER

Integrated premium driver on the back of the fixture.

### OPTICAL SYSTEM

Back-lit optics produces uniform light output, diffuser lens reduces glare and improve overall energy efficiency.

### DIMMING

0-.10V dimmable

### ENERGY SAVINGS

Up to 50% energy savings than traditionally fluorescent fixtures, Little to no maintenance.

### Certificate

ETL

### WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours.



<b>Size</b>	2'x2'/2'x4'
<b>5Wattage</b>	Max 40W / Max72W
<b>5CCT</b>	3000K/3500K/4000K/ 5000K/6500K (Adjustable)
<b>Beam Angle</b>	120°
<b>Input Voltage</b>	100-277V
<b>Frequency Range</b>	50/60Hz
<b>CRI</b>	>80


<b>PF</b>	>0.95
<b>THD</b>	<=20%
<b>Rating</b>	IP20
<b>Dimming</b>	0-10V DC
<b>Lifetime</b>	50,000 hours
<b>Operating Temperature</b>	-4°F to 113°F (-20°C to 45°C)



**ORDERING INFORMATION**

Model	Size	Wattage	Voltage	CCT	Dimming	Packing/carton
ZS-BL2x2-S40-3065	2FTx2FT	20W, 25W, 30W, 35W, 40W (Adjustable)	100-277V	3000K, 3500K, 4000K, 5000K, 6500K (Adjustable)	0-10V	25.6*9.9*25.6 inch 6 pieces 1*40HQ Loading=3888pcs
ZS-BL2x4-S72-3065	2FTx4FT	30W, 40W, 50W, 60W, 72W (Adjustable)	100-277V	3000K, 3500K, 4000K, 5000K, 6500K (Adjustable)	0-10V	49.6*9.9*25.6 inch 6 pieces 1*40HQ Loading=2040pcs

**PHYSICALSPEIFICATIONS**

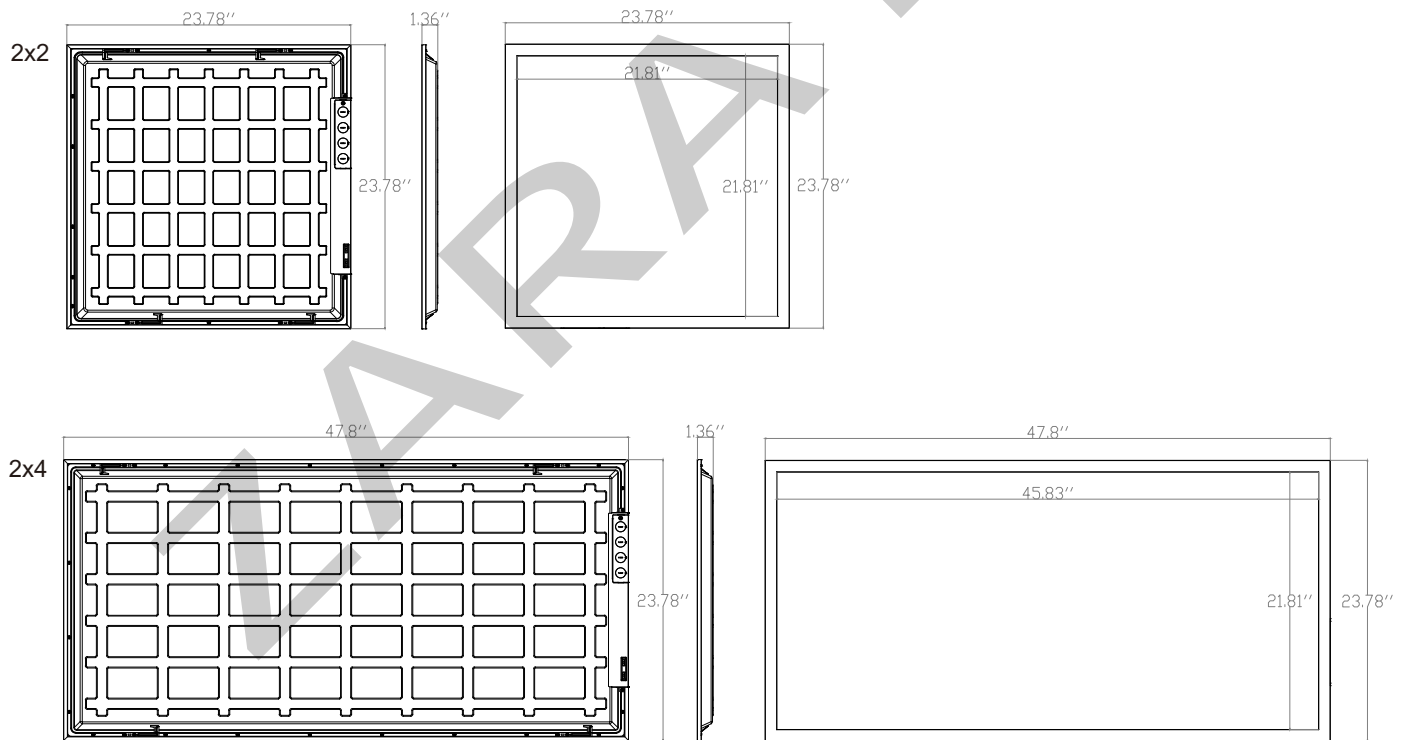


**PRODUCT WEIGHT**

1 Piece-2'x2'	1 Piece-2'x4'
4.10 lbs.	8.43 lbs.



## Wiring Diagram

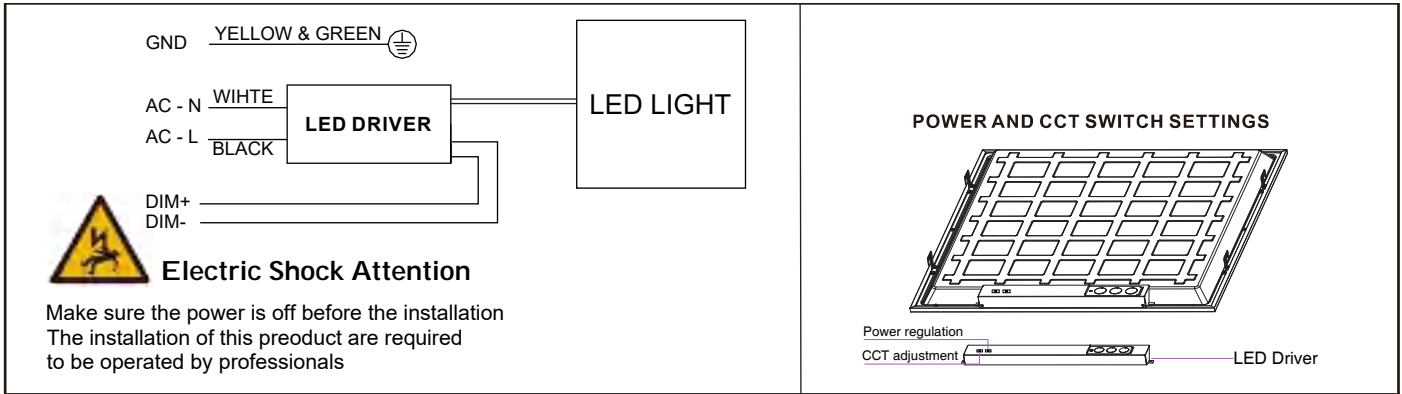

## INSTALLATION INSTRUCTION

