

4" Recessed Down Light -9W LED Dimmable Retrofit Kit


Model Number:

BL-D4-09YYZZ



Performance Summary

- ⊙ Aluminum Alloy Body with Built-in Trim Ring
- ⊙ Easy Installation into Standard 4" Downlight Can
- ⊙ Safe and Cool to Touch
- ⊙ Replace up to 80W Halogen Bulb
- ⊙ Certificate: UL/CUL Energy Star, LM79
- ⊙ Application: Home, Office, Shopping Malls
- ⊙ Warranty: 5 Years

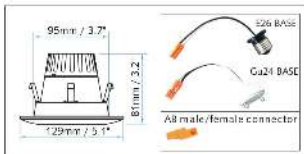

Ordering Information:

| Item Number | Description | LED Type | Power | Voltage Input | Dimmable | CCT | Lumen Output |
|--------------|---|---------------|-------|---------------|------------|-------|--------------|
| BL-D4-0930ZZ | 4" LED Downlight Retrofit-9 Watts 3000K | SMD2835/20pcs | 9W | 120V | Yes, Triac | 3000K | 720lm |
| BL-D4-0940ZZ | 4" LED Downlight Retrofit-9 Watts 4000K | SMD2835/20pcs | 9W | 120V | Yes, Triac | 4000K | 770lm |
| BL-D4-0950ZZ | 4" LED Downlight Retrofit-9 Watts 5000K | SMD2835/20pcs | 9W | 120V | Yes, Triac | 5000K | 820lm |


* Model Number: BL-D4-XXYYZZ

Designation for suffix: XX=rated wattage, from 0 to 99K, YY=rated color temperature, 30 for 3000K, ZZ= represent commercial use code, which could be letter 'A' to 'Z'

Other Performances

Lumen Efficacy: 80lm/w~90lm/w CRI: Ra>80 Power Factor>0.9 THD<20 Voltage Input: 120V ac
Dimmable to 1%~100%, compatible with most triac dimmers. Lutron & Leviton is recommended. Suitable for Damp Location.
Certificate: UL/CUL Energy Star, LM79


Lux Chart

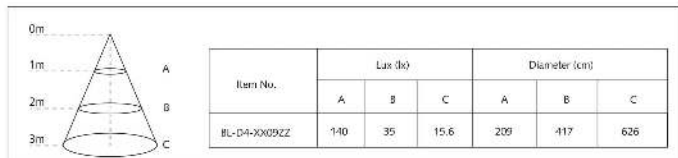

LM79
LM80



Photometrics

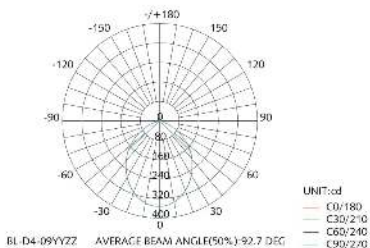

Installation Instruction

Step 1
Twist Adapter into Socket

Step 2
Insert Male Connector into Female Connector

Step 3
Insert LED into Can Housing
(Recessed Can Housing Not Included)



LED lighting facts
Average Beam Angle: 92.7°

| | |
|---|-------------------|
| Light Output (Lumens) | 722 |
| Watts | 9 |
| Lumens per Watt (Efficacy) | 80 |
| Color Accuracy Color Rendering Index (CRI) | 83 |
| Light Color (Measured at 2m @ 20°) | 3000 (Warm White) |
| Warm White | 3000K |
| Bright White | 4000K |
| Daylight | 5000K |

©2015 Lighting Facts, Inc. All rights reserved. For more information, please visit www.lightingfacts.com. Photo: www.lightingfacts.com. Photo: www.lightingfacts.com. Photo: www.lightingfacts.com.

Packaging

| Dimension | Carton size | G.W./Carton | Quantity |
|-----------|---------------|-------------|----------|
| 4" | 470x298x298mm | 5.82KG | 20pcs |



LM79
LM80

