

6" Recessed Down Light -13W LED Dimmable Retrofit Kit

Model Number:

BL-D6-13YYZZ

Performance Summary

- ⊙ Aluminum Alloy Body with Built-in Trim Ring
- ⊙ Easy Installation into Standard 6" Downlight Can
- ⊙ Safe and Cool to Touch
- ⊙ Replace up to 80W Halogen Bulb
- ⊙ Certificate: UL/cUL Energy Star, LM79
- ⊙ Application: Home, Office, Shopping Malls
- ⊙ Warranty: 5 Years



Ordering Information:

Item Number	Description	LED Type	Power	Voltage Input	Dimmable	CCT	Lumen Output
BL-D6-1330ZZ	6" LED Downlight Retrofit-13 Watts 3000K	SMD2835/24pcs	13W	120V	Yes, Triac	3000K	1000lm
BL-D6-1340ZZ	6" LED Downlight Retrofit-13 Watts 4000K	SMD2835/24pcs	13W	120V	Yes, Triac	4000K	1050lm
BL-D6-1350ZZ	6" LED Downlight Retrofit-13 Watts 5000K	SMD2835/24pcs	13W	120V	Yes, Triac	5000K	1100lm


* Model Number: BL-D6-XXYYZZ

Designation for suffix: XX=rated wattage, from 0 to 99K, YY=rated color temperature, 30 for 3000K, ZZ= represent commercial use code, which could be letter 'A' to 'Z'

Other Performances

Lumen Efficacy: 80lm/w~90lm/w CRI: Ra>80, Power Factor>0.9 THD <20, Voltage Input: 120V ac.
Dimmable to 1%~100%, compatible with most Triac dimmers. Lutron& Leviton is recommended. Suitable for Damp Location


Lux Chart

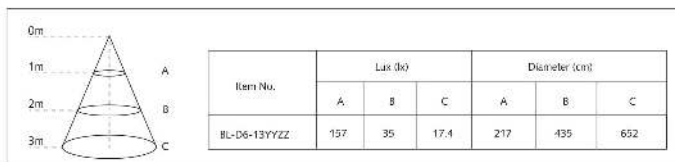

LM79
LM80



Photometrics

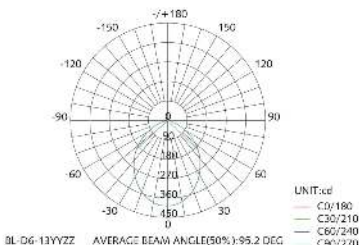

UNIT:cd
 — C0/180
 — C30/210
 — C60/240
 — C90/270

Installation Instruction



Step 1
Twist Adapter into Socket





Step 2
Insert Male Connector into Female Connector



Step 3
Insert LED into Can Housing
(Recessed Can Housing Not Included)

Packaging

Dimension	Carton size	G.W./Carton	Quantity
6"	495x450x118mm	7.4KG	20pcs



LM79
LM80

